

XCB XENON BEACON RANGE

Low power consumption and high durability make this range ideal for plant and contracting, agriculture, utility, fleet and forklift vehicles.




MAIN FEATURES

- Multi-voltage (10-100V)
- 70mph rated on magnetic version
- Nominal flash rate: 75 per minute
- Sealed against dust and moisture ingress
- -30°C to +50°C extreme temperature reliability
- Current consumption: 0.18A @ 12V, 0.15A @ 24V, 0.08A @ 48V, 0.03A @ 80V, 0.02A @ 100V

KEY POINTS



LENS COLOURS

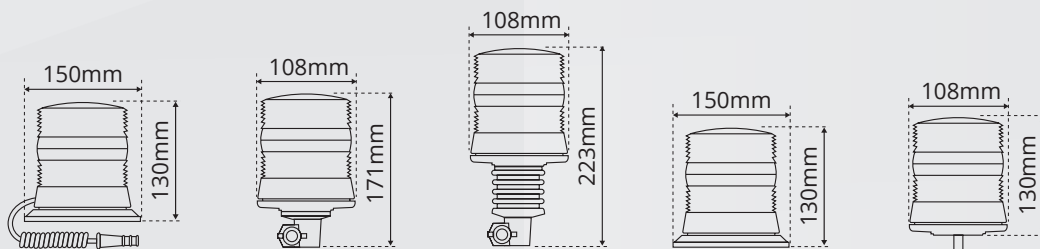

Amber	XCB0202	XCB0302	XCB0402	XCB0502	XCB0602
Fitting	Magnetic	DIN	Flexi-DIN	3-Point	Single Point
Weight	0.6KG	0.5KG	0.5KG	0.4KG	0.5KG