

CLBT162A

MINI AMBER LED LIGHTBAR RANGE
WITH SINGLE & TWIN POINT FITTINGS



enquiries@lapelec.co.uk

+44 (0)121 386 7377



INTRODUCING THE NEW LOOK CLBT162A LED LIGHTBAR RANGE WITH IMPROVED LED MODULES.


Now manufactured with 48 x 3W LEDs,
the CLBT162A range is available with
single point and twin point fittings.



MAIN FEATURES

- Multi-voltage (10-30V)
- Double flash only
- Single point and twin point fixings
- Dimensions: 400 (L) x 180 (W) x 134mm (H)
- Manufactured with 48 x 3W amber LEDs
- Amber polycarbonate lens
- Current consumption: 4.0A @ 12V, 2.0A @ 24V
- -30°C to +50°C extreme temperature reliability

DIMENSIONS

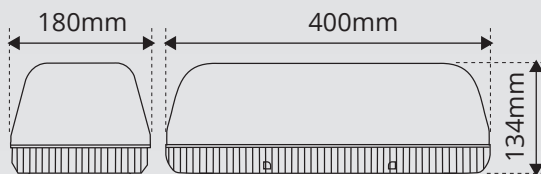

Part Number	Mounting
CLBT162A/SP	Single Point
CLBT162A/TB	Twin Point



ALSO AVAILABLE 63202210

Stainless steel 60mm roof mounting
bracket for CLBT162A/SP.



www.lapelec.co.uk