
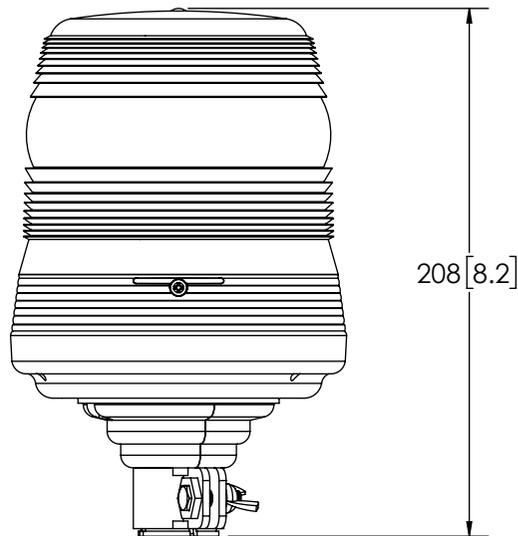


REVISION HISTORY		
REV.	DESCRIPTION	DATE
C	REVISE PER VA CR 1697	2014-05-12
D	REVISE PER LC0133	2015-10-01
E	REVISED PER LC1277	2019-02-18

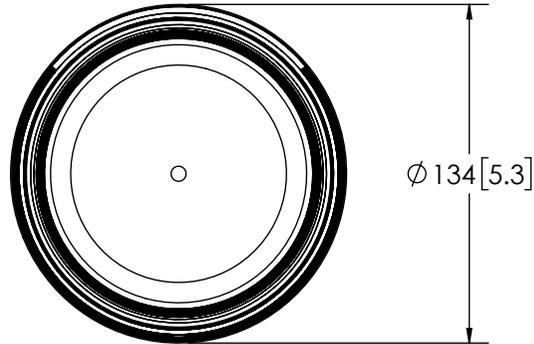

**SPECIFICATIONS:**

1. CERTIFICATIONS; UN ECE R10 APPROVED  
 Note: Unique components, accessories and hardware kits are not typically included in the product certification test protocols. Unless otherwise Specified, the product certification referred to herein are predicated upon The base product model configuration.
2. FLASH MODE: HEX FLASH PATTERN (60 FPM)
3. VOLTAGE (NOMINAL): 12/24v DC
4. VOLTAGE (EXTREME): 10 to 32v DC
5. CURRENT (RMS): 0.2A (@ 10 VDC NOMINAL)
6. CURRENT (PEAK): 0.35A (@ 10 VDC NOMINAL)
7. POWER (RMS MAXIMUM): 2.5W (@ 24 VDC NOMINAL)
8. TEMPERATURE RANGE: -20°C TO 50°C
9. CONNECTION: RED (POSITIVE), BLACK (NEGATIVE)
10. MOUNTING: FLEXI MOUNT
11. BASE MATERIAL: POLYCARBONATE
12. LENS MATERIAL: POLYCARBONATE
13. PRODUCT WEIGHT: 0.8KG APPROX

- NOTES:**
1. DIMENSIONS IN MILLIMETERS (INCHES)
  2. WIRES, CABLES, CONNECTORS AND TIE WRAPS NOT SHOWN

SCALE 1:3		APPROVALS	DATE	 <b>ECCO</b> ® www.eccolink.com Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 63322444											
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: C		DRAWN BY	2017-09-08												
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED	LSH 2017-09-21												
<table border="1"> <tr> <th>MILLIMETERS DECIMALS</th> <th>INCHES DECIMALS</th> <th>ANGLES</th> </tr> <tr> <td>XX. ± 1.0mm</td> <td>X.X ± 0.1</td> <td>± 0.5°</td> </tr> <tr> <td>XX.X ± 0.5mm</td> <td>X.XX ± 0.04</td> <td>FRACTIONS</td> </tr> <tr> <td></td> <td>X.XXX ± 0.02</td> <td>± 1/64</td> </tr> </table>		MILLIMETERS DECIMALS	INCHES DECIMALS		ANGLES	XX. ± 1.0mm	X.X ± 0.1	± 0.5°	XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS		X.XXX ± 0.02	± 1/64	MECH. ENG.
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES													
XX. ± 1.0mm	X.X ± 0.1	± 0.5°													
XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS													
	X.XXX ± 0.02	± 1/64													
		ELEC. ENG.	RMF 2017-09-22	<b>BEACON,400,FLEXI DIN LED,AMBER,12/24V</b>											
		TEST ENG.	DFG 2017-09-18	CUSTOMER PART NO. 5L4.204											
		SALES.	JSM 2018-06-05	PRODUCT SERIES: 400											
		Electronically Controlled Use Latest Copy		SIZE: A4 DWG. NO. 5L4.204 REV. E											
		SHEET 1 OF 1		Project: LC0133 Date Created: 09-Jun-04											

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2017 ELECTRONIC CONTROLS CO.

