
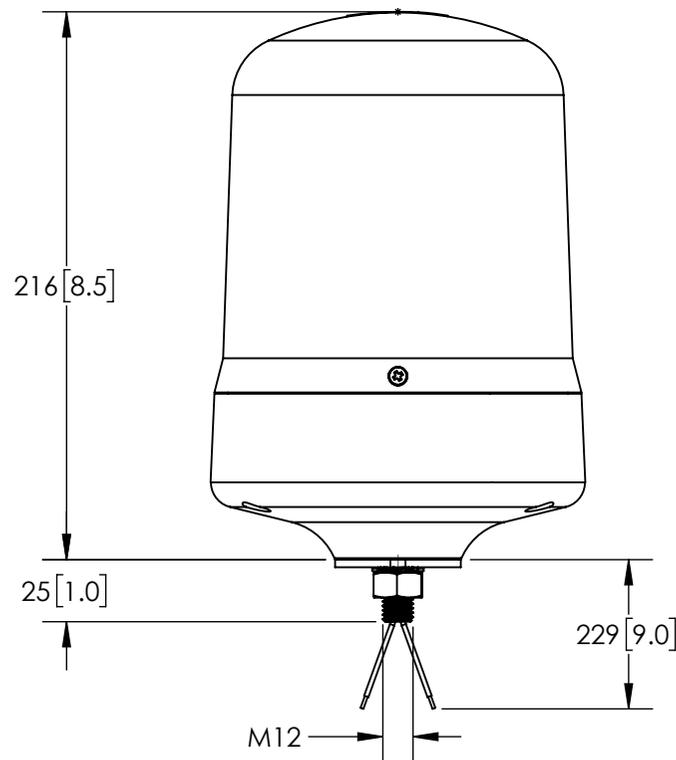


REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE PER LL0189	2017-11-16
A	INITIAL RELEASE PER LL0189	2018-02-16

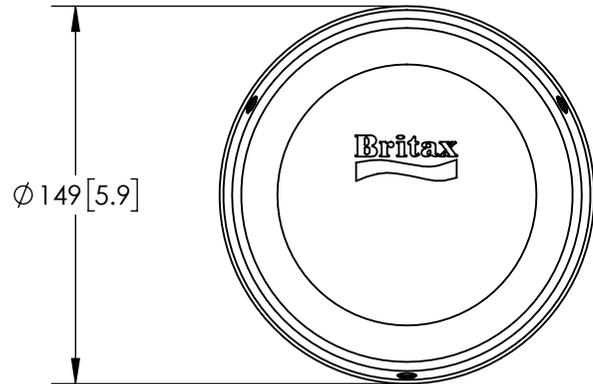

SPECIFICATIONS


- CERTIFICATIONS: R65, ECE 10.04 - EMC APPROVED
Note: Unique components, accessories and hardware kits are not typically included in the product certification test protocols. Unless otherwise specified, the product certification referred to herein are predicated upon The base product model configuration.
- FLASH MODE: 125±5 FLASHES PER MINUTE (FPM), DOUBLE FLASH
- VOLTAGE NOMINAL: 12 & 24 VDC
- VOLTAGE EXTREME: 10 TO 30 VDC
- CURRENT (PEAK): 2.7A (at 12 VDC NOMINAL) OR 1.35A (at 24 VDC NOMINAL)
- CURRENT (AVERAGE): 1.2A (at 12 VDC NOMINAL) OR 0.6A (at 24 VDC NOMINAL)
- POWER (MAXIMUM): 32.4W (at 12/24 VDC NOMINAL)
- TEMPERATURE RANGE: -20° C TO +50° C
- CONNECTION: 2-CONDUCTOR PVC INSULATED CABLE, 24/0.2 (0.75²mm) TO ISO 6722 : 2006 (CLASS B)
- MOUNTING: 1 BOLT
- BASE MATERIAL: POLYPROPYLENE
- LENS MATERIAL: ACRYLIC
- PRODUCT WEIGHT: 0.85kg APPROX

NOTES:

- DIMENSIONS IN MILLIMETERS [INCHES FOR REFERENCE]
- DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINE (* - EXCEPTION)

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2017 ELECTRONIC CONTROLS CO.

SCALE 1:3		APPROVALS	DATE	 www.britax-pmg.com www.britaxae.com.au Europe +44 (0)1262 670161 Asia Pacific +61 (0)7 32937900	
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A		DRAWN BY: JUP	2017-11-20	BEACON CLEAR LENS SINGLE BOLT R65 CUSTOMER PART NO. B201.54.LDV PRODUCT SERIES: B200	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED: LSH	2017-11-20		
MILLIMETERS DECIMALS XX ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	ANGLES ± 0.5°	MECH. ENG.	ELEC. ENG. MMG	2017-11-17
		FRACTIONS ± 1/64	TEST ENG. DFG	2017-11-16	
THIRD ANGLE PROJECTION		SALES.		SIZE: A4	DWG. NO. B201.54.LDV
		Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: LL0189
				Date Created: 2017-11-16	REV. A