

FULL LED DRIVING LAMP WITH LIGHT-BAR

PART NO.: 1001-1670 - SMOKED CHROME

PART NO.: 1001-1685 - BRILLIANT SILVER



www.boremanltd.com

Brilliant Full LED technology, Full Beam
+ integrated Light Bar Position Light



Smoked Chrome



Brilliant Silver



Smoked Chrome



Brilliant Silver

Aerodynamic shape ensuring aggressive fuel savings

Product Features:

- Fully sealed, IP67K housing
- Lightest weight (0.9Kg) Full LED Driving Lamp on the market
- Dual Voltage: 12V & 24V
- Aerodynamic shape ensuring aggressive fuel savings
- Includes premium superseal connector + cable, for ease of fitment
- Brilliant light bar technology offering a continuous bar of light in alignment of a standard position light
- Connector: AMP 3 Wire (AMP 282105-1)
- ECE R112/R10/R7
- Reference of 30
- 3-year Manufacturer's Warranty
- Life Span: 30,000+ hours
- Supplied complete with the male waterproof connector
- Current Draw: 0.86 amp@12v & 0.54 amp@24v
- Temperature Range: -40°C ~+50°C
- Available in Smoked Chrome & Brilliant Silver

Information:



Part No.:	Beam Pattern:	Supply:	Connection Method:	Life Span:	
1001-1670	Smoked Chrome	Driving Light	12V & 24V Dual Voltage	Superseal connector + cable (included), click and seal	30,000+ Hours
1001-1685	Brilliant Silver	Driving Light	12V & 24V Dual Voltage	Superseal connector + cable (included), click and seal	30,000+ Hours



Available from your nearest dealer

www.boremanltd.com | info@boremanltd.com | Tel: +353 49 4367049

FULL LED DRIVING LAMP WITH LIGHT-BAR



PART NO.: 1001-1670 - SMOKED CHROME

PART NO.: 1001-1685 - BRILLIANT SILVER



www.boremanltd.com

Dimensions:

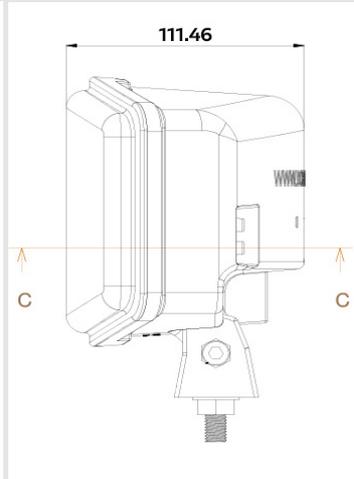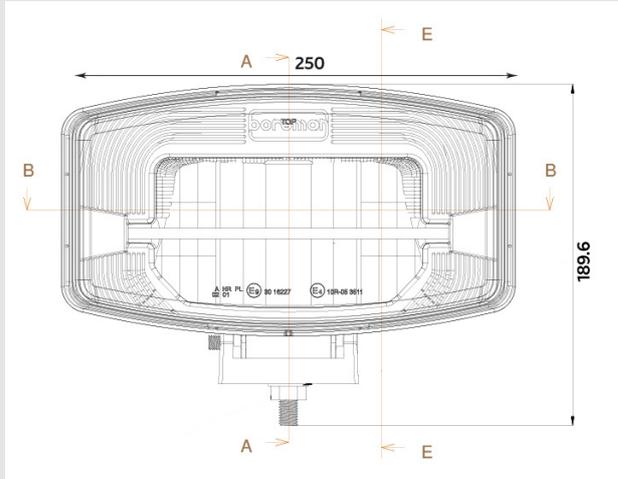


Rear View of Lamp:




Superseal connection ensures water tightness

Beam Pattern:

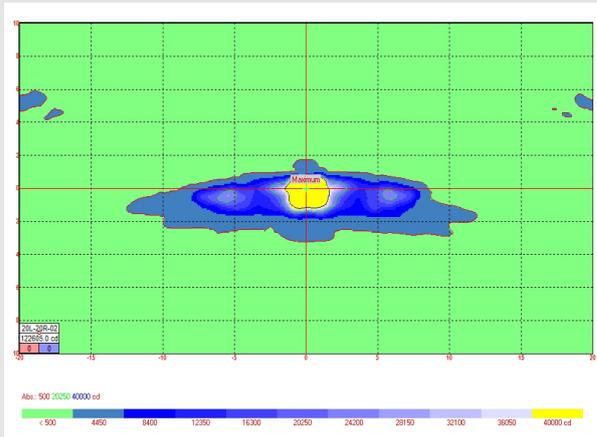

Light Distribution:

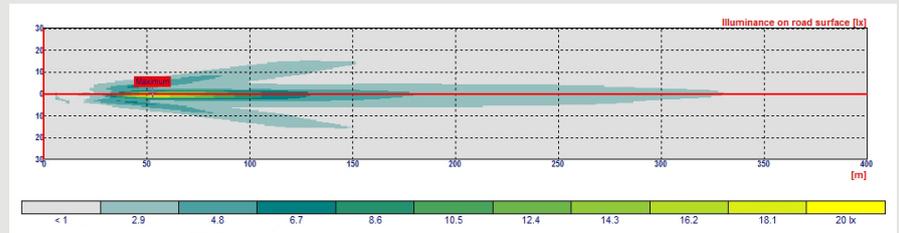

Wiring Protocol:

