

'TLED' LED MODULES

R65 APPROVED LOW PROFILE LED WARNING MODULES
AVAILABLE IN 3 LED, 4 LED AND 6 LED OPTIONS.



THE LOW PROFILE 'TLED' RANGE OF AMBER LED WARNING MODULES NOW WITH IP69K INGRESS PROTECTION AND CISPR25 CLASS 3 APPROVAL.

With 3 LED, 4 LED and 6 LED options in the range, the 'TLED' family has a low profile design at only 7mm in height. Manufactured with ultra-bright 3W amber LEDs the 'TLED' range is programmed with 3 x ECE R65 approved flash patterns.



KEY POINTS



APPLICATIONS




MAIN FEATURES

- ✓ Multi-voltage (10-30V)
- ✓ Three R65 approved flash patterns (single, double & quad)
- ✓ Manufactured with 3W amber LEDs
- ✓ 3 LED, 4 LED and 6 LED options
- ✓ CISPR25 class 3 approved
- ✓ Link multiple units for synchronised flash
- ✓ IP69K ingress protected



TLED RANGE & DIMENSIONS

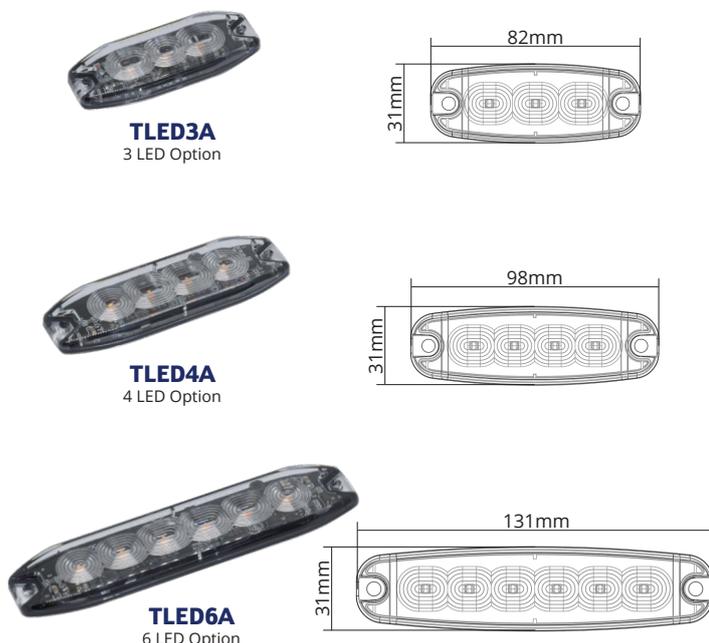

Part Number	Number of LEDs	LED Colour	R65 Approval	Current	
				@ 12V	@ 24V
TLED3A	3	Amber	✓	0.75A	0.38A
TLED3B	3	Blue	✓	0.75A	0.38A
TLED3G	3	Green	-	0.75A	0.38A
TLED3R	3	Red	-	0.75A	0.38A
TLED3W	3	White	-	0.75A	0.38A
TLED4A	4	Amber	✓	1.00A	0.50A
TLED4B	4	Blue	✓	1.00A	0.50A
TLED4G	4	Green	-	1.00A	0.50A
TLED4R	4	Red	-	1.00A	0.50A
TLED4W	4	White	-	1.00A	0.50A
TLED6A	6	Amber	✓	1.50A	0.75A
TLED6B	6	Blue	✓	1.50A	0.75A
TLED6G	6	Green	-	1.50A	0.75A
TLED6R	6	Red	-	1.50A	0.75A
TLED6W	6	White	-	1.50A	0.75A