



REVISION HISTORY		
REV.	DESCRIPTION	DATE
C	REVISE PER LC0208	2016-10-17
D	REVISE PER LP0015	2017-06-15
E	REVISED PER LC3039	2021-01-04

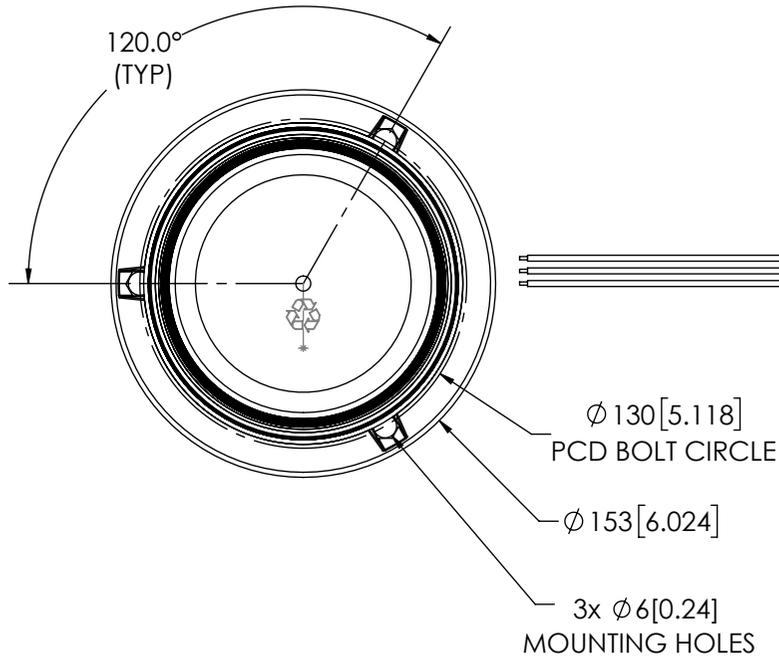

3-18 AWG WIRES
 RED - POSITIVE (+)
 BLACK - NEGATIVE (-)
 YELLOW - SYNC
 CABLE LENGTH - APPROX 350MM

SPECIFICATIONS

- CERTIFICATIONS; R10; CAP 168 & IP65;
 Note: Unique components, accessories and hardware kits are not typically included in the product certification test protocols. Unless otherwise Specified, the product certification referred to herein are predicated upon The base product model configuration.
- FLASH MODE: STATIC FLASH: 60 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12/24 VDC.
- VOLTAGE (EXTREME): 10 - 30 VDC.
- CURRENT (AVG): 1.2A (@ 12 VDC NOMINAL)
- CURRENT (PEAK): 2A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 24W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -30°C TO 50°C
- CONNECTION: 18 AWG WIRES
- MOUNTING: 3 BOLT MOUNTING
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.6KG

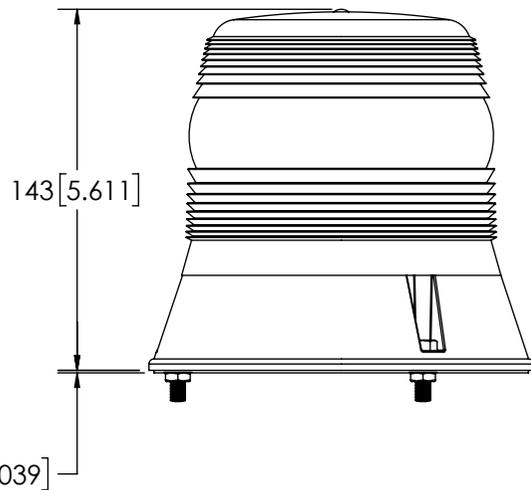

- NOTES:
- DIMENSIONS IN MILLIMETERS [INCHES (FOR REFERENCE)]
 - USE SUB ASSEMBLY (100-V11050.168) FOR MANUFACTURE

SCALE 1:3			APPROVALS	DATE	 ECCO ® www.eccolink.com <small>Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444</small>												
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: D			DRAWN BY: CRT	2020-12-02		BEACON, 400, 3BOLT, 168 LED, AMB, 12/24V CUSTOMER PART NO. V11050.168											
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			CHECKED: LSH	2020-12-15													
<table border="1"> <tr> <th>MILLIMETERS DECIMALS</th> <th>INCHES DECIMALS</th> <th>ANGLES</th> </tr> <tr> <td>XX. ± 1.0mm</td> <td>X.X ± 0.1</td> <td>± 0.5°</td> </tr> <tr> <td>XX.X ± 0.5mm</td> <td>X.XX ± 0.04</td> <td>FRACTIONS</td> </tr> <tr> <td></td> <td>X.XXX ± 0.02</td> <td>± 1/64</td> </tr> </table>			MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES	XX. ± 1.0mm	X.X ± 0.1	± 0.5°	XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS		X.XXX ± 0.02	± 1/64	MECH. ENG. KW	2020-12-07	SIZE: A4 DWG. NO. V11050.168 SHEET 1 OF 1 Project: LC0208 Date Created: 2015-11-23
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES															
XX. ± 1.0mm	X.X ± 0.1	± 0.5°															
XX.X ± 0.5mm	X.XX ± 0.04	FRACTIONS															
	X.XXX ± 0.02	± 1/64															
			ELEC. ENG. MMG	2020-12-03													
			TEST ENG. AD	2021-01-04	Project: LC0208 Date Created: 2015-11-23												
			SALES.														
PROPRIETARY AND CONFIDENTIAL INFORMATION <small>THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK, AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2015 ELECTRONIC CONTROLS COMPANY</small>			Electronically Controlled Use Latest Copy		REV. E												

