

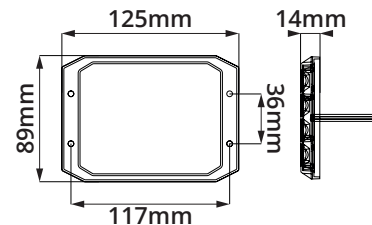


HXLED RANGE

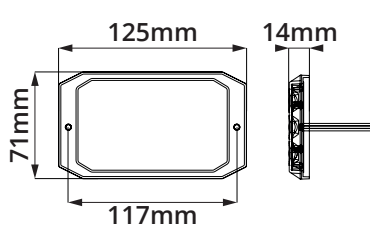

MAIN FEATURES

- Multi-voltage (10-30V)
- Single flash meets R65 approval
- Heavy duty aluminium die-cast housing
- Tough polycarbonate lens
- Manufactured with 1W amber LEDs
- Link multiple units for sync or alternate flash
- Steady on function

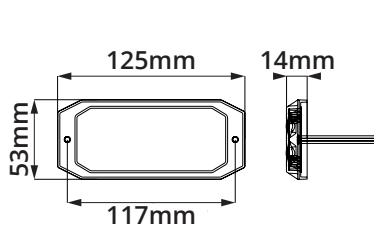

Part Number	Mounted Dimensions	Fixing Points	Number of 1W Amber LEDs	LED Colour / Lens Colour Configuration	Current Consumption @ 12V / 24V	Weight
HXLED12A	125 x 53 x 14mm	Two	12	Amber LEDs / Clear Lens	1.0A / 0.5A	0.18KG
HXLED18A	125 x 71 x 14mm	Two	18		1.5A / 0.8A	0.21KG
HXLED24A	125 x 89 x 14mm	Four	24		2.0A / 1.0A	0.26KG