

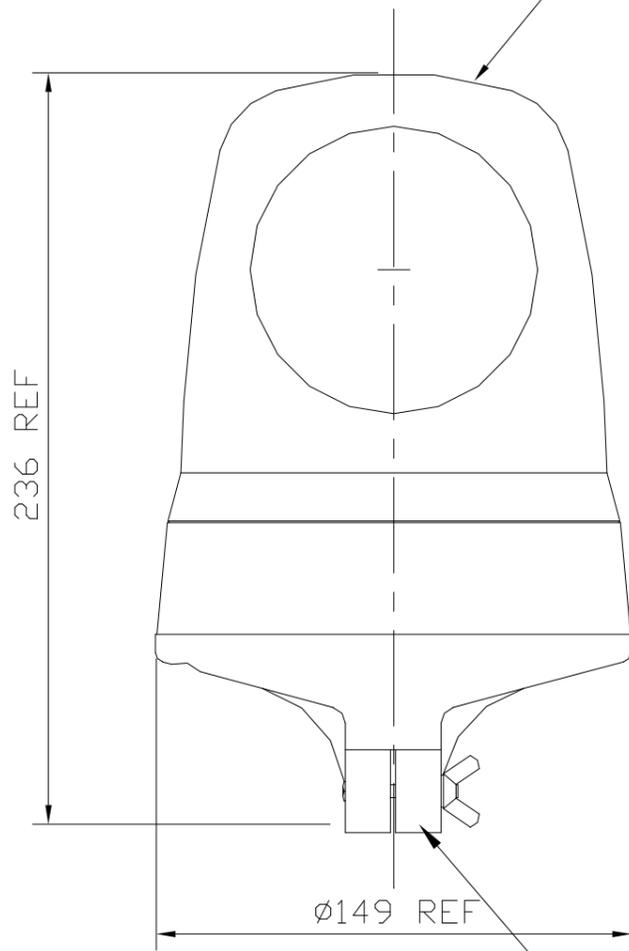


1046

E APPROVAL DETAILS



13109
ADAPTOR SOCKET
AND TUBE
(SUPPLIED SEPERATELY)

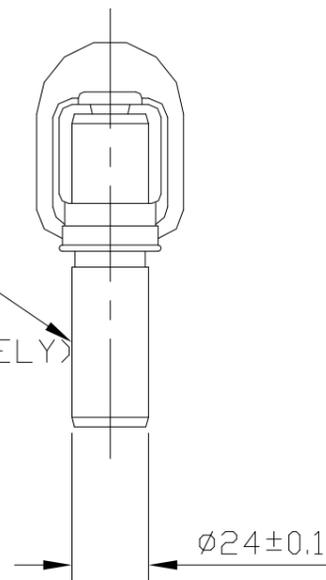

SINGLE POLE PLUG TO SPEC.
DIN72591 (ISO 4165)

CERTIFICATION PROCEDURE INVOLVED -
UNAUTHORISED DEVIATION STRICTLY
FORBIDDEN

MOD No	REFERENCE	ISS	DATE	BY
4481	PRE-PROD REL.	1	14/04/93	A.S.
4628	PRODUCTION REL.	A	12/07/93	R.W.
4736		B	30/09/93	C.W.
5743		C	11/12/95	M.E.
5783		D	15/01/96	K.K.
15586		E	02/01/03	S.B.

NOTES

- ENVIRONMENTAL PERFORMANCE :-
- COMPLIES WITH BRITAX (PMG) LTD SPECIFICATION ENS 054, SAE J845 AND VIBRATION TO SAE J575 JUL'83.
 - APPROVED TO EMC DIRECTIVES 95/54/EC, 2000/2/EC AND 97/24/EC ch8.
 - COMPLIES WITH ELECTROMAGNETIC COMPATIBILITY DIRECTIVE 89/336/EEC.
 - APPROVED TO ECE REG.10 AND REG.65.

OPERATING TEMPERATURE : -30 TO +50 DEG.C
 DUAL VOLTAGE : 12V 24V
 BULB TYPE : H1 55W H1 70W
 CURRENT CONSUMPTION : 4.6A 3.0A
 FLASH RATE : 160 PER MINUTE
 - NOMINAL
 ROTATION : CW FROM ABOVE

ESTIMATED MASS


TOOL No.

DIMENSIONS IN MILLIMETRES
DO NOT SCALE IF IN DOUBT - ASK

DRAWN IN ACCORDANCE WITH BS308

DIMENSIONAL TOLERANCES :

3RD ANGLE PROJECTION



METRIC DESIGN

BRITAX (PMG) LTD
 BESSINGBY INDUSTRIAL ESTATE
 BRIDLINGTON
 NORTH HUMBERSIDE
 YO16 4SJ



DRAWN	DATE	CHECKED	SCALE
A.SHARP	17/02/93	R.W.	1:2

TITLE
 OUTLINE
 ROTATING BEACON
 BELT DRIVEN

A 3	PART No.	Sht No 1 of 2
	392	