



## **0-441-11 - Magnetic Li Ion Rechargeable Amber LED Warning Lights**

Durite LED Li Ion Rechargeable Amber Warning Lamps with magnetic base (rated 70MPH). Supplied in a BMC with UK 230VAC and 12/24VDC Cigarette charger. 3.7VDC 2200mAh. PC Lens, ABS housing. E Marked R10, ECE R65 (while connected to 12/24VDC).

**THE TRUSTED QUALITY BRAND FOR PROFESSIONALS**



## WARNINGS


This product contains either strobe light(s), halogen light(s), high-intensity LEDs or a combination of these lights. Do not stare directly into these lights. Momentary blindness and/or eye damage could result.

Use only soap and water to clean the outer lens. Use of other chemicals could result in premature lens cracking (crazing) and discoloration. Lenses in this condition have significantly reduced effectiveness. Inspect and operate this product regularly to confirm its proper operation and mounting condition.

Do not use a pressure washer to clean this product.

It is recommended that these instructions be stored in a safe place and referred to when performing maintenance and/or reinstallation of this product.

## BOX CONTENTS

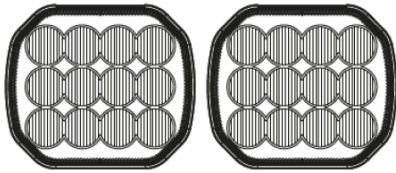

**Two Lights**



1PC British Adapter



1PC European Cigar Plug



1PC 1 to 2 DC Plug Cable


## OPERATION



- 1** On/Off Switch
- 2** Charging Port
- 3** Battery Indicator



When the red light of the indicator is flashing , for your safety ,please charge the light

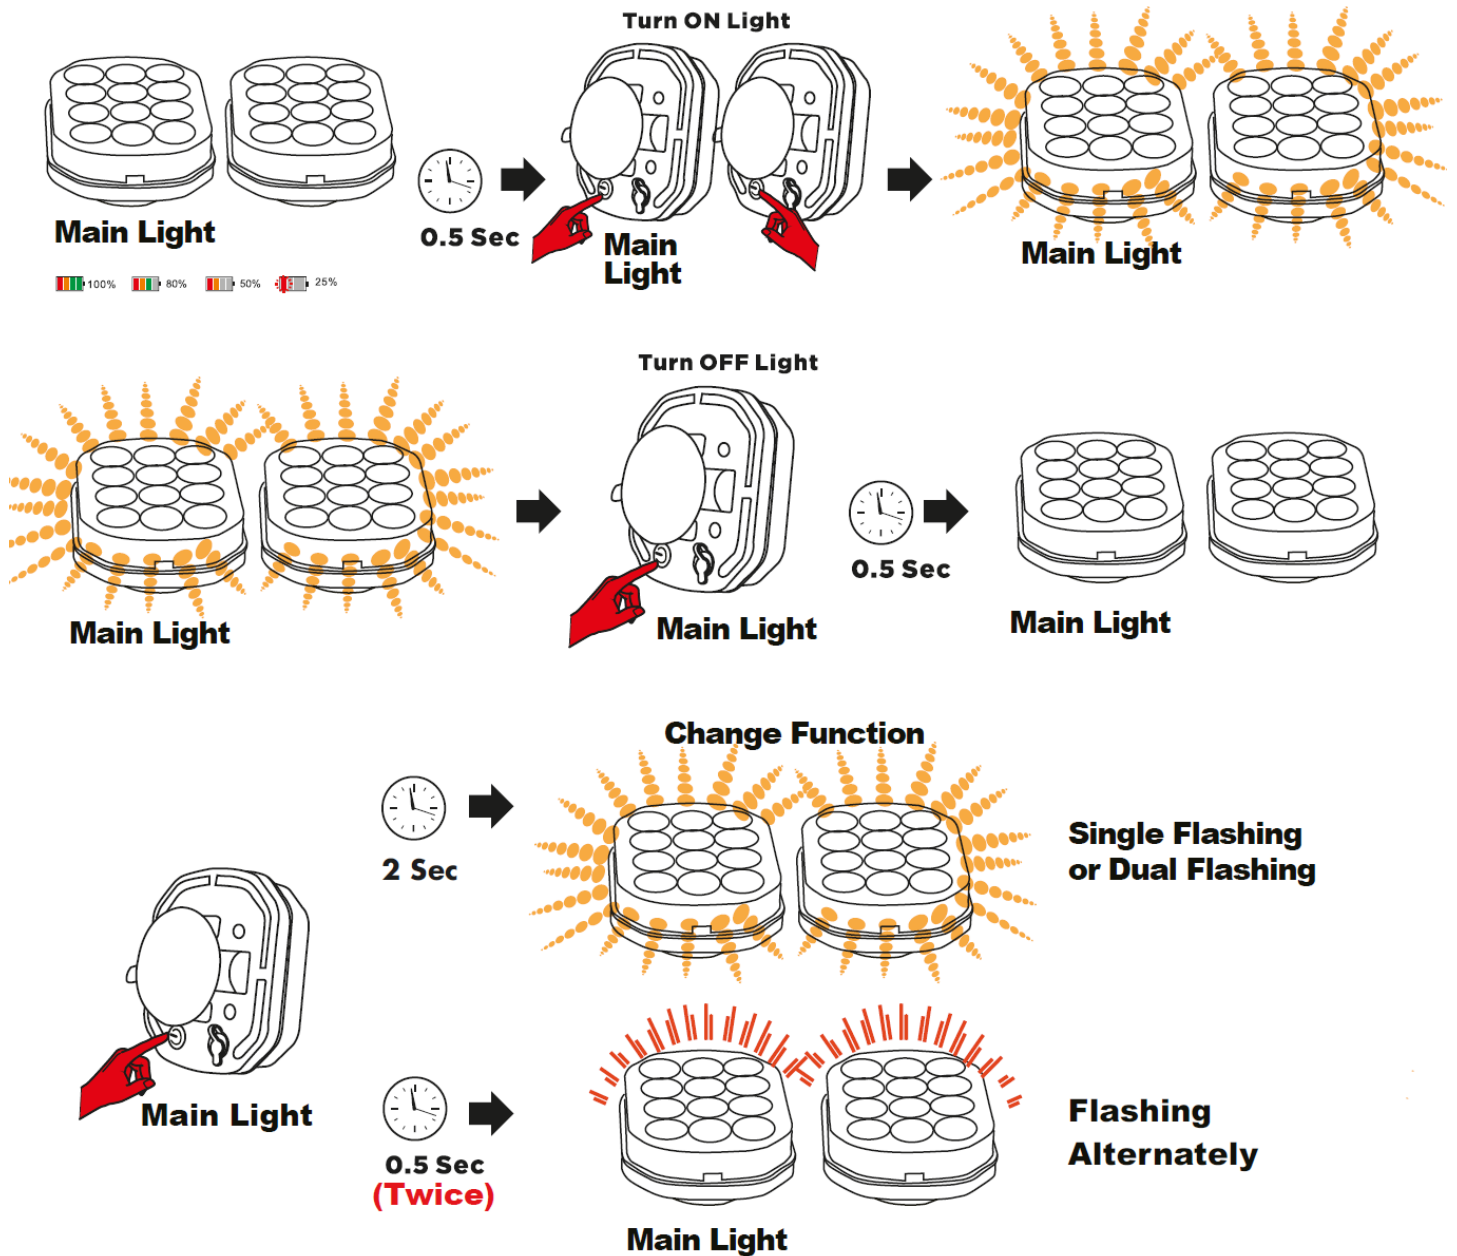

## PAIRING

Step 1: Press one of the lights main button (1) for 0.5S to turn on, and then press and hold for 5S to enter pairing mode. The power indicator will begin flashing.

Step 2: Press the other light main button (1) for 0.5S as soon as possible to turn on. At this time, the system is in the paired state by default. After the pairing succeeds, the indicator of this light will flash and then goes off, and the two lamps are successfully paired.

Step 3: At this time, the system of "Main Light" is still in pairing mode, and the power indicator is still flashing at present as well. You can manually turn off the light or automatically exit the pairing mode after 5S. When you restart the two lights again, they have finished pairing.

1: After the pairing succeeds:

Press the switches of the two lights for 0.5S to turn on.

Only press the switch of the "Main Light" for 0.5S to turn off the two lights.

Only press the switch of the "Main Light" for 2S to change the functions of the two lights.

2: The "Main Light" must enter the pairing mode within 5S. If it does not receive a pairing signal within 5S, it will exit the pairing mode.

## TECHNICAL SPECIFICATIONS

Type	Magnetic Amber LED Warning Light Li Ion
Voltage	12-24VDC
Battery	3.7VDC 2200mAh
LED's	12 x SMD 3030
Power	6W
Flash Patterns	Single Flash, Double Flash, Alternating Flash
Charging Time	1 - 2 Hours
Run Time	3 - 4 Hours
Magnetic Base Speed Rating	70MPH
IP Rating	IP66
Material Construction	ABS with PC Lens. Bracket SS304 / Rubber
Weight	0.700Kg
Dimensions	Please see below
Operating Temperature	0°C ~ +50°C
Storage Temperature	-10°C ~ +60°C
Certificate	UKCA CE E Mark E Mark R10, R65 (12/24VDC only)

## TECHNICAL DRAWING

