12 Series Low-Profile Vehicle Lighting



| Part# | Description | EAN Code |
|-------|--|---------------|
| 12ARM | Low-Profile Stop / Tail / Indicator Lamp | 9335962034826 |
| 12FM | Low-Profile Rear Fog Lamp | 9335962036684 |
| 12WM | Low-Profile Reverse Lamp | 9335962036691 |

 Voltage
 12/24V

 Dimensions
 131 x 30 x 8mm

 IP rating
 IP67

Warranty 5 Years Cable 250mm (stripped-end)

Current draw (13.8V / 28V) Indicator: 0.14A / 0.15A, Stop: 0.19A / 0.2A, Tail: 0.01A / 0.02A,

Fog: 0.16A / 0.10A, Reverse: 0.21A / 0.21A

 ECE approval
 Function
 Approval#

 Rear Indicator (R6)
 2a-E9-01.22623

 Stop / Tail (R7)
 R1-S1-E9-02.22623

 Fog (R38)
 F1-E9-00.22188

Fog (R38) F1-E9-00.22188 Reverse (R23) AR-E9-00.22177

 Wiring colour codes
 YELLOW: Indicator [+]
 BLUE: Fog [+]

 RED: Stop [+]
 BROWN: Tail [+]

 BLACK: Reverse [+]
 WHITE: Earth [-]

Mounting instructions

A Installation to be undertaken by a competent professional


3M™ ADHESIVE EASY MOUNTING SYSTEM

Ensure mounting surface is flat, clean and dry prior to installation.

- 1. Drill a small hole for the wires to enter.
- 2. Peel one side's adhesive tape protective layer and fix the tape to the rear of the lamp, aligning the breather holes.
- 3. Peel off the last protective layer, feed the wires through the hole, press and hold lamp in desired position.

Alternatively, fix to mounting surface using screws provided, or use both adhesive tape and screws.



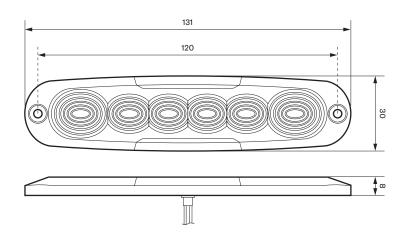

T: +44 (0)121 313 2222 **E:** sales@ledautolamps-uk.com