





# LAPCV405 & LAPCV406

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 52 x 1W OSRAM LEDs
- 5200 raw / 2296 effective Lumen
- Straight housing
- IP68 and IP69K ingress protection
- Angled flood beam
- Dimensions: 150 (L) x 47 (W) x 40mm (H)
- Current consumption: 1.5A @ 12V, 0.8A @ 24V

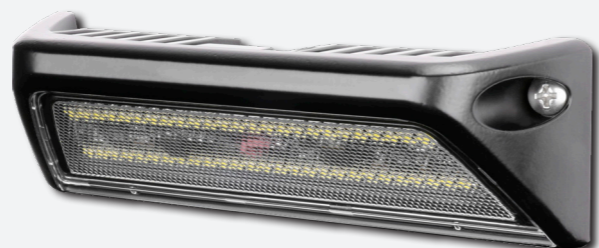

LAPCV405

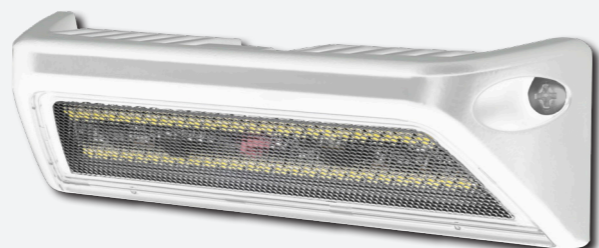

LAPCV406

### KEY POINTS



# LAPCV407 & LAPCV408

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 20 x 1W OSRAM LEDs
- 2000 raw / 1229 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 231 (L) x 47 (W) x 40mm (H)
- Current consumption: 1.6A @ 12V, 0.8A @ 24V



LAPCV407



LAPCV408

### KEY POINTS



# LAPCV409 & LAPCV410

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 32 x 1W OSRAM LEDs
- 3200 raw / 1760 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 312 (L) x 47 (W) x 40mm (H)
- Current consumption: 2.7A @ 12V, 1.3A @ 24V



LAPCV409



LAPCV410

### KEY POINTS



# LAPCV411 & LAPCV412

## MAIN FEATURES

- Multi-voltage (10-30V)
- Manufactured with 46 x 1W OSRAM LEDs
- 4600 raw / 2522 effective Lumen
- Curved housing
- IP67 ingress protection
- Angled flood beam
- Dimensions: 392 (L) x 55 (W) x 48mm (H)
- Current consumption: 3.8A @ 12V, 1.9A @ 24V



LAPCV411



LAPCV412

### KEY POINTS

