REVISION HISTORY		
REV.	DESCRIPTION	DATE
D	REVISE PER EC3718	2015-06-26
E	REVISE PER EC3718	2018-04-10
F	REVISED PER EP0002	2018-04-10

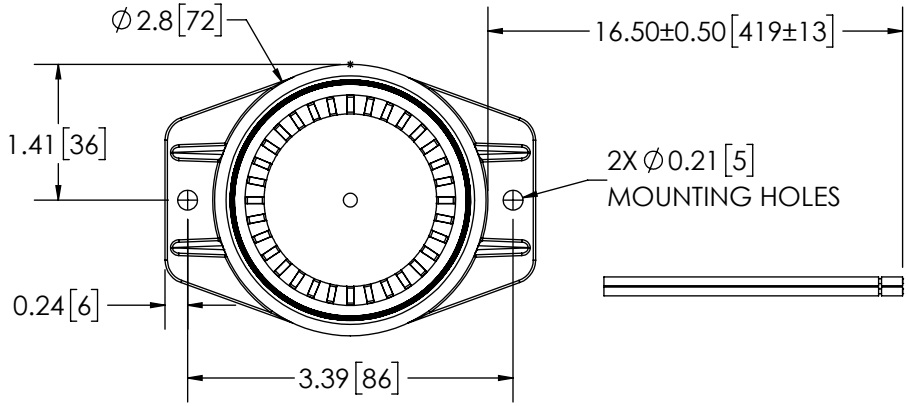

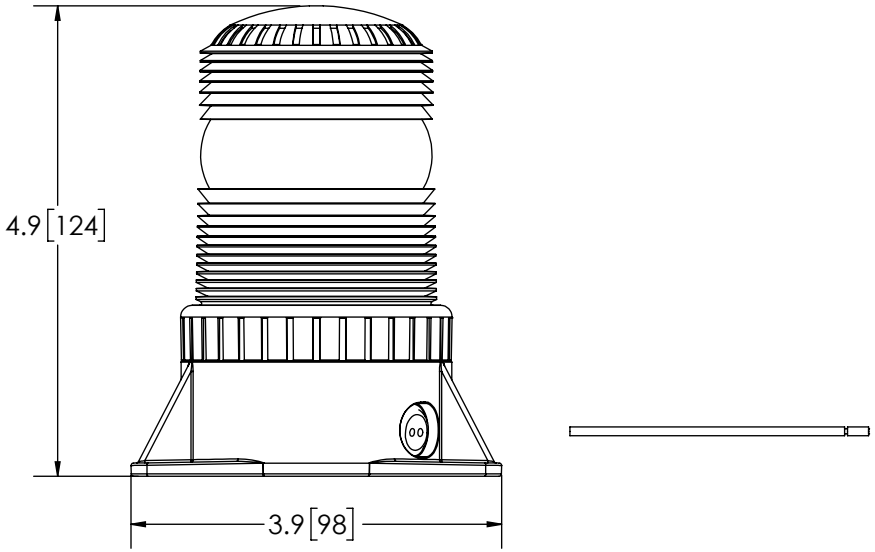

SPECIFICATIONS

1. CERTIFICATIONS: CE ; ; ECE R10; SAE SEE CHART ; ; IP-66D/IP-67D for a Category 2, Versatile enclosure
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: PULSE8 : 80 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12-80 VDC
4. VOLTAGE (EXTREME): 9-94 VDC
5. CURRENT (PEAK): 0.12A (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): 1.5W (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
8. CONNECTION: 2-16 AWG LEAD WIRES
9. MOUNTING: 2 BOLT
10. BASE MATERIAL: GF POLYPROPYLENE
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 0.62 LBS (0.28 Kg)

FG PRODUCT CHART		
FG P/N	**COLOR**	**SAE J845 JUN 2013**
6262A	AMBER	CLASS 3
6262B	BLUE	N/A
6262C	CLEAR	CLASS 3
6262G	GREEN	N/A
6262R	RED	CLASS 3

NOTES:
1. ROHS COMPLIANT
2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

SCALE 1:2

CAD GENERATED DRAWING
DO NOT MANUALLY UPDATE.
MODEL REFERENCED: C

TOLERANCES ARE IN INCHES, AND MILLIMETERS
TOLERANCES UNLESS OTHERWISE STATED ARE:

MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	± 0.5°
		FRACTIONS ± 1/64

THIRD ANGLE PROJECTION

APPROVALS		DATE
DRAWN	Annie Braithwaite	2018-04-10
CHECKED	ABB	
MECH. ENG.	JLA	
ELEC. ENG.	GCJ	
TEST ENG.	JRT	
SALES.	ARS	

Electronically Controlled Use Latest Copy

ECCO® www.eccolink.com
Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

LED BEACON,360*,12-80VDC

CUSTOMER PART NO.	PRODUCT SERIES:	
SEE CHART	6200	
SIZE: A	DWG. NO. 6262X	REV. F
SHEET 1 OF 1	Project: P12001	Date Created: 2013-01-03