




Selectable
CAP168
Flash
Pattern



LAP-LUNAR280

MAIN FEATURES

- Multi-voltage (10-30V)
- Clear polycarbonate lens
- Supplied with 1m cable
- Selectable CAP168 airport flash pattern
- Dimensions: 280 (L) x 259 (W) x 36mm (H)
- Four R65 approved flash patterns including single and double flash
- Manufactured with 108 x 0.5W amber LEDs
- Complete LUNAR range available (page 48)

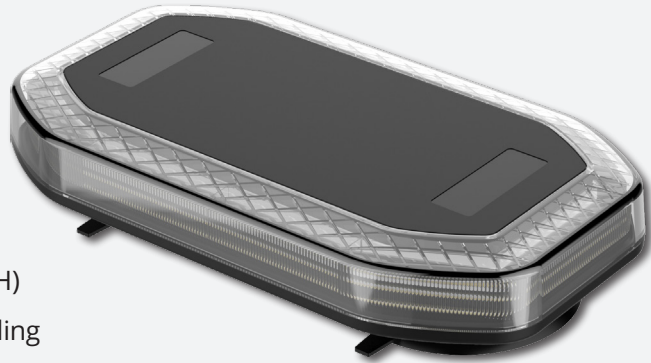

KEY POINTS

R65
APPROVED
CLASS II

R10
APPROVED

3 YEAR
WARRANTY

IP67
INGRESS
PROTECTION

Part Number	Mounting	Current @ 12V / 24V
LAP-LUNAR280	Single Point	4.5A / 2.3A

LAP1436AC/SP

MAIN FEATURES

- Multi-voltage (10-30V)
- 10 flash patterns
- Single and double flash meet R65 approval
- Single point fixing
- Dimensions: 360 (L) x 168 (W) x 40mm (H)
- Manufactured with 36 x 1W amber LEDs
- Clear polycarbonate lens



KEY POINTS

R65
APPROVED

R10
APPROVED

3 YEAR
WARRANTY

IP65
INGRESS
PROTECTION

Part Number	Mounting	Current @ 12V / 24V
LAP1436AC/SP	Single Point	3.0A / 1.5A