
REVISION HISTORY						
REV.	DESCRIPTION	DATE				
D	REVISE PER VA CR 1641	2014-03-10				
Е	REVISE PER LC0098	2015-09-10				
F	REVISED PER LC0098	2019-03-07				

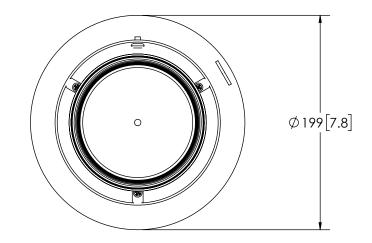

SPECIFICATIONS:

1. CERTIFICATIONS; R10 & R65 APPROVED

Note: Unique components, accessories and hardware kits are not typically Included in the product certification test protocols. Unless otherwise Specified, the product certification referred to herein are predicated upon The base product model configuration.

2. FLASH MODE:

SINGLE: 60 ± 5 FLASHES PER MINUTE

SINGLE: 125 ± 5 FLASHES PER MINUTE (R65) DOUBLE: 125 ± 5 FLASHES PER MINUTE (R65)

TRIPLE: 75 ± 5 FLASHES PER MINUTE QUAD: 75 ± 5 FLASHES PER MINUTE 3. VOLTAGE (NOMINAL): 12/24 VDC 4. VOLTAGE (EXTREME): 10 - 30 VDC

5. CURRENT (PEAK): 2.0A (@ 12 VDC NOMINAL)


6. POWER (MAXIMUM): 24W (@ 12 VDC NOMINAL)

7. TEMPERATURE RANGE: -20°C TO 50°C

8. CONNECTION: 18 AWG WIRES IN A CABLE

9. MOUNTING: MAGNETIC 70 MPH

10. BASE MATERIAL: ABS

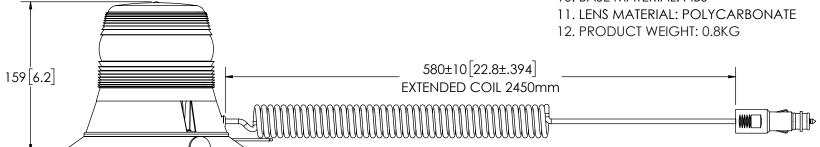

NOTES:

1. DIMENSIONS IN MILLIMETRES (INCHES FOR REFERENCE)

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO, AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO QUISIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2017 ELECTRONIC CONTROLS CO.

	SCALE 1:3.5			APP	ROVALS	DATE	
	CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: E			DRAWN BY		2017-09-04	
				CHECKED	LSH	2017-09-05	− €
	TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG.	JGW	2017-10-16	Ame
	MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES ± 0.5°	ELEC. ENG.	MMG	2017-09-07	BI
	XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	FRACTIONS	TEST ENG.	DFG	2017-09-05	CUST
	THI	IRD ANGLE PROJECTION	± 1/64	SALES.	JSM	2018-06-05	
						CI7E	



ericas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

BEACON, 400, MAG 70, AMBER, REG65 LED

STOMER PART NO. /11054 PRODUCT SERIES: 400 Series DWG. NO. V11054

Date Created: 09-Jun-04 Electronically Controlled Use Latest Copy SHEET 1 OF 1