

1006 / 1007 / 1008 / 1009 SERIES

Flexible Outline Marker Lamps



Part#	Description	EAN Code
1006LE	Front / Rear Stalk Marker, Left, Bulk Pack	9335962034901
1006RE	Front / Rear Stalk Marker, Right, Bulk Pack	9335962034918
1006LRE2	Front / Rear Stalk Marker, Twin Pack, Blister Pack	9335962034925
1007LE	Front / Rear / Side Stalk Marker, Left, Bulk Pack	9335962034932
1007RE	Front / Rear / Side Stalk Marker, Right, Bulk Pack	9335962034949
1007LRE2	Front / Rear / Side Stalk Marker, Twin Pack, Blister Pack	9335962034956
1008LE	Front / Rear Short Marker, Left, Bulk Pack	9335962035625
1008RE	Front / Rear Short Marker, Right, Bulk Pack	9335962035632
1008LRE2	Front / Rear Short Marker, Twin Pack, Blister Pack	9335962035649
1009LE	Front / Rear / Side Short Marker, Left, Bulk Pack	9335962035656
1009RE	Front / Rear / Side Short Marker, Right, Bulk Pack	9335962035663
1009LRE2	Front / Rear / Side Short Marker, Twin Pack, Blister Pack	9335962035670





1006 / 1007



1008 / 1009

Voltage	9-36V
Dimensions	1006 / 1007: 183 x 131 x 52mm 1008 / 1009: 102 x 70 x 52mm
IP rating	IP67
Warranty	5 Years
Cable	300mm (stripped-end)
Operating temperature	-30°C to +50°C
Current draw (13.8V / 28V)	0.05A / 0.05A

ECE approval	Function	Approval#
	Side Marker (R91)	SM1-E9-00.22669
	Rear Marker (R7)	R1-E9-02.22669
	Front Marker (R7)	A-E9-02.22669

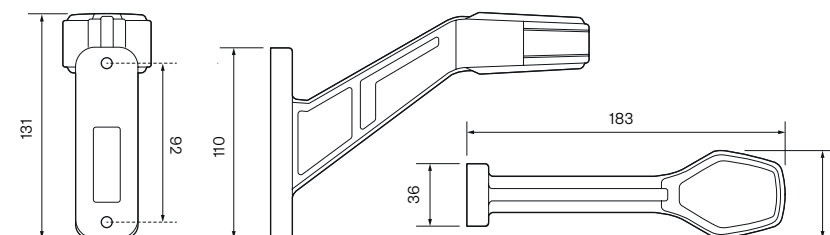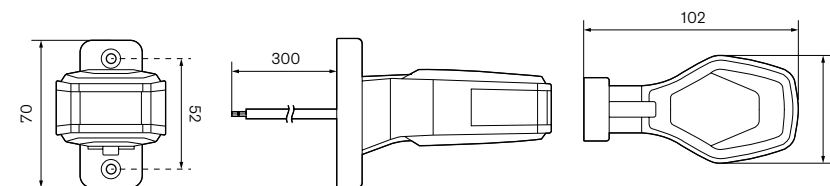

Wiring colour codes
 BLACK: Power [+]
 WHITE: Earth [-]

Mounting instructions

⚠ Installation to be undertaken by a competent professional

Ensure mounting surface is flat, clean and dry prior to installation.

1. Drill a hole on the fixing surface at the desired placement
2. Feed the wire through the hole in the fixing surface
3. Surface mount the lamp using the screws provided